Cycling fun on three wheels



Recumbent technology













Delta tx – the chopper e-trike for everyday life and leisure from HP VELOTECHNIK. The dignified way to be mobile on three wheels.



Enjoy safety in comfort! The Delta tx combines e-mobility and design to create a unique riding experience

Delta tx – the easiest entry into the e-trike class

The comfortable Delta tx makes safe cycling easier than ever before! It starts as soon as you get on: The high seating position and low-slung frame make it easy to get on and off, while the variable seat systems allow you to find your perfect position in no time. You'll enjoy an excellent overview of traffic, a secure position when stopping at traffic lights, and a panoramic view on a country ride.

The controls on the ergonomic handlebars are always easy to reach, making steering, shifting gears, and braking a breeze. Wonder what the best part is? You'll receive support in every situation! All *Delta tx* trikes from HP VELOTECHNIK come equipped with an electric motor up to 25 km/h (16 mph) or up to 20 mph for the USA, including a push assist up to 6 km/h (4 mph). Four motor systems with different power profiles are available, and you can choose a fully automatic gearshift for each of the motors. Simply pedal in your own pace, your trike will select the right gear for you!

The comfortably suspended frame is crucial for the stable riding characteristics. The suspension element underneath the seat can be individually adjusted to your weight and a total load of up to 145 kg (320 lbs). The voluminous *Super Moto-X* tires developed by SCHWALBE especially for e-bikes roll extremely smoothly. With their 62 mm (2.44") width the tires also offer plenty of grip, even on poor roads.

The Delta tx offers a superior riding experience with high tipping stability. The seat is positioned between the rear wheels to optimize the center of gravity, while the low position of the motor and battery, as well as the generously dimensioned and deeply positioned luggage basket, ensure a safe and stable ride.

Top class: The *Delta tx* is lightweight in every aspect. With its sturdy aluminum frame, the lightest version weighs just 35 kilograms (78 lbs) including motor and battery. Your lightweight *Delta tx* excels in the premium league of motorized tricycles!

Transporting your trike is easy: The *Delta tx* is separable for transportation, allowing you to disassemble it into three space-saving parts in three minutes. You can easily lift them into your car and still have enough space for your luggage. For maximum mobility, you only need a minimum of tools -a 5 mm Allen key!

We offer the Delta tx in two versions. With the Special Edition models (SE models), you don't have to spend time evaluating the many possibilities of our modular system. You will receive your trike almost fully equipped with a versatile set of components, based on our many years of experience as a custom bike manufacturer. If you opt for a Delta tx in the modular system, you can choose your favorite options and have your E-Chopper built exactly according to your wishes. Your HP VELO-TECHNIK dealer will be happy to advise you!





Take hold of the *Delta* **tx**! The ingenious design ensures smooth directional stability and maximum flexibility. With a turning circle of just 3.20 meters (10'5"), you'll be able to navigate even the tightest spaces with ease.

Not an inch too high: The *Delta tx* achieves a comfortable step-through height of just 35 cm (12.6") by elegantly positioning the cables and the smooth-running chain guard low against the frame. No shoe will get stuck.

Not an inch too wide: At 75 cm (29.5"), the *Delta tx* is conveniently narrow. This means that you can also ride on narrow paths without any problems. And if you want to take your trike through your gate and door to park it, you can easily roll inside.







With the Ergo-Mesh Premium seat, the angles of the seat base and backrest can be adjusted seperatly thanks to the Seat-O-Flex hinge (see picture above and top right).

Fitting while sitting

With OrthoFlex[®], you can fine-tune the seat perfectly to your body shape. The technology consists of four highly breathable padding blocks made of open-pored polyurethane material. You simply insert these 3D cushions into the side pockets of the seat, adjust them to your comfort requirements and close the pockets with Velcro. If the alignment is not yet as desired, the easiest way to readjust the cushions is while seated: Sit back in the ErgoMesh or ErgoMesh Premium seat, open the pockets and optimize the position of the cushions for best support. For a particularly snug fit, you can also cut the cushions to size. With OrthoFlex® technology, you can enjoy a comfortable seating experience like never before.



Even in the basic version with the *ErgoMesh* seat, you can choose between two sizes and two heights.

Seat with customized shape

In addition to positioning the $\textit{OrthoFlex}^{\textcircled{B}}$ upholstery, you can also adjust the straps on the back

Hypalon® material, which is otherwise often used

in boat building, to ensure optimum power trans-

mission at the transition from the strap system to

of your seat to adapt the mesh seats to your individual body shape. The backrest of the *ErgoMesh* is fitted with five straps, the *ErgoMesh Premium* has six straps. They can be adjusted tighter or looser in seconds using a ladder buckle. Two additional straps are located under the seat. You can use the strap system to tighten the mesh cover of the seat either selectively or over a large area. HP VELO-TECHNIK uses the extremely resistant

the seat cover.


Your seat, your throne

At HP VELOTECHNIK, we believe that the key to a comfortable ride is a really comfortable seat. That's why we have developed the *Delta tx* with the utmost attention to seating comfort. Our *ErgoMesh* and *ErgoMesh Premium* seats are designed to provide maximum ventilation and adjustability. You can choose between two heights: the standard or the *HS* version, which is 11 cm (4.3") higher and provides a better overview. Depending on your height and therefore the position of the seat on the frame, you can sit at a height of 59 to 71 cm (23" to 28").

The ErgoMesh and ErgoMesh Premium seats are also available in two sizes: standard and XL. The XL seats are each 5 cm (2") wider. Their backrests are also slightly higher and the seats bases slightly lower than the standard seats. You can adjust the shape of the seat to your body by tightening or loosening the tensioning straps on the back of the seat.

Our OrthoFlex® technology ensures that even the standard *ErgoMesh* mesh seat offers plenty of scope for further ergonomic adjustments. It consists of four highly breathable cushions that can be individually cut to size. You insert these 3D cushions into the sides of the seat and backrest and adjust them according to your preferences.

For the ultimate in comfort, our *ErgoMesh Premium* seat offers independent adjustment of the inclination of the backrest and seat base within a range of 25°. With the optional *Seat angle adapter*, you can raise the backrest up to a further 9° steeper.

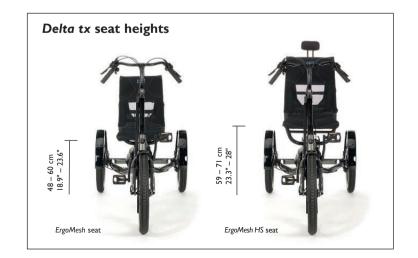



Good traction: With the *Freewheelin' Twin* drive technology used by HPVELOTECHNIK for the *Delta tx*, both rear wheels are driven when riding straight ahead. When cornering, you have powerful propulsion without a complicated differential gear, even on ice and snow.

Want to ride fully loaded? We've got you covered!

Secret competition for cargo bikes: Transform your *Delta tx* into a versatile transporter! With our various luggage systems, you can carry a total up to 50 kg (110 lbs) of cargo easily, safely and with optimum suspension on your trike.

Are you looking for a trike that can carry all your luggage with ease? Look no further than the *Delta tx*! It is designed to accommodate as much luggage as possible with the lowest possible center of gravity. Regarding this aspect, the space between the rear wheels is the logical choice for accommodating a practical transport basket. Due to the elegant design of the *Delta tx*, this space is so generous that HP VELO-TECHNIK has developed an extra-large basket for you! You can easily remove the 25 cm (9.8") high container by the handle and turn it into your shopping companion.

You can also use the Delta tx without the basket and load a large crate of beverages, for example. The platform carrier is securely attached to the suspended part of the frame and has a comfortable loading height of 38 cm (15"). The internal dimensions are $48 \times 32.5 \text{ cm} (18.9" \times 12.8")$ and the maximum load is 25 kg (55 lbs).

Above the platform carrier with the large basket, there is still plenty of space for a standard bike bag. Simply hang it in the optional *Bag mount* behind the seat to carry up to 12 kg (26.5 lbs) of extra cargo. Additionally the *Add-on bags* designed by HPVELOTECHNIK can be attached to the right and left of the seat. The practical bags, each with 1.4 liters of storage space (1.5 kg or 3.3 lbs), are easy to clip on and off – your highly variable companion on a day trip.

Small luggage, right at hand: Our Side bag mounts are the perfect option for attaching standard handlebar bags to the right, left or both sides of the seat. The load capacity of each is 5 kg (11 lbs). And if you want to keep things really cool, you can also fit the practical holders with a standard bicycle cup holder.

In addition to the platform carrier, you can opt for the *Trailer coupling* option. This allows you to pull a child or cargo trailer behind you with a total weight of up to 40 kg (88.2 lbs).



The optional Add-on bags behind the seat are ideal for your small luggage. The left pocket has an airy mesh fabric on the side, ideal for stashing the optional protective cover. That allows the contents to dry while you continue your journey.



Perfect for touring and traveling: With the optional *Bag mount*, you can carry a standard bike bag safely behind the seat.



With the Side bag mount, you can mount handlebar bags on each side of the seat. They are always within easy reach, even while you are riding your trike.



One frame size for the whole family

The main frame of the *Delta* **tx** comes always in one size. It offers space for people between 1.59 (5'2") and 2.00 meters (6'7") tall. For stepless adjustment, simply open the two quick-release levers to slide the seat on the frame.

The handlebar system is also adjustable in length and height. The elegantly curved standard stem conveys a real chopper feeling, while the shorter, straighter version makes the steering feel more dynamic and responsive. The short stem is also recommended for people under approx. I.70 m (5'6") tall. This means that the *Delta tx* also offers plenty of scope to adjust it to your individual preferences for arm and hand positions.

The Delta tx can be split into three parts in around three minutes. The only tool you need is a 5 mm Allen key. The front section has a packing size of $119 \times 60 \times 42$ cm (46.8" x 23.6" x 16.5"; L x H x W, with pedals), the rear section measures $122 \times 75 \times 60$ cm (48" x 29.5" x 23.6"; with handlebars and platform carrier). The seat can be easily stowed next to it for transportation in your car. The weight of the two frame parts is approximately the same, namely around 16 kg (36 lbs) each. This is a great advantage after splitting the trike when lifting the individual parts!

Check out our video on our homepage www.hpvelotechnik.com to find out how to split the trike. You will also learn how to easily attach the handlebars under the platform carrier and disconnect the motor cable connector.





Technical Data

| Seat height 48-71 cm (19-28") |
|-----------------------------------|
| Seat width |
| ErgoMesh 38 cm (15") |
| ErgoMesh Premium 41 cm (16.1") |
| ErgoMesh XL 43 cm (16.9") |
| ErgoMesh Premium XL 46 cm (18.1") |
| Adjusting angle |
| ErgoMesh / HS 8° / 13° |
| ErgoMesh Premium 14° (back rest) |
| II° (seat base) |

| Bottom bracket height | 43 cm (17") |
|-----------------------|------------------------------|
| Step-through height | 35 cm (13.8") |
| Suspension travel | 8 cm (3.1", rear) |
| Wheel size | 20" (ISO 406) |
| Max. tire width | 62 mm (2.5") |
| Length | 221 cm (87") |
| Wheelbase | 150 cm (59") |
| Width | 75 cm (29.5") |
| Track width | 69 cm (27") |
| Height (max.) | 128 cm (50.4", seat upright) |
| | |

| Turning circle 3,20 m (10'5", outer wheel) |
|--|
| Handlebar width 63 cm (24.8") |
| Weight from 35 kg (78 lbs) |
| Payload (max.) 145 kg (320 lbs) |
| Payload luggage (max.) up to 50 kg (110 lbs) |
| Frame material Aluminum 6061 T6 |
| Powder coating Blue flash or |
| Sparkling iron gray |
| Rider height 1,59 - 2,00 m (5'2" - 6'7") |
| Warranty on frame 10 years |

Drivetrain



Let's go! Our basic model from BAFANG provides you with full power from the very first pedal stroke.



Lots of torgue and full acceleration: The top model, the SHIMANO STEPS EP801 Cargo, ensures maximum riding pleasure.



Undercover, but no secret: The cover at the rear protects the rotating parts of the intermediate gear.

Always with motor! And a fully automatic gearshift on request

You can choose from four different electric motors for your Delta tx. All of them are bottom bracket motors that provide additional assistance up to 25 km/h (16 mph), or up to 20 mph in the USA. The basic version comes with the M300 from BAFANG. Regardless of how forcefully you pedal, it unleashes its power as soon as you start pedaling. You don't even need a throttle for this. The rotation-controlled system offers five power levels and helps you to ride home relaxed even when you start feeling tired.

If you appreciate a more sporty feeling, choose one of the three torgue-controlled SHIMANO STEPS motors: the more powerful you pedal, the more assistance the system provides. The E5000 system is ideal if you are looking for a motor with a medium level of assistance at an attractive price. The E6100 provides 50 percent more torque power. The high-end EP801 Cargo system provides 85 Nm and 600 W maximum power for rapid acceleration from the very first pedal stroke.

Many cyclists love to shift gears extensively in order to always pedal in the optimum range. With our automatic gearshifts adapted to the motor profiles, you always ride in the optimum range without having to lift a finger. While you are waiting at a red light, for example, your system has already shifted into the right gear.

The ENVIOLO Trekking Automatig hub is an ideal addition to the BAFANG motor. It not only changes the gear ratio automatically, but even without steps!

The Nexus Di2 8-speed hub is a great partner for the E5000 and *E6100* motors. With the top model, the powerful *EP801 Cargo*, you have the choice between the continuously variable ENVIOLO or the Cues Di2 from SHIMANO. The Cues is fascinating as the world's first electric automatic derailleur. Even when you are not pedaling. the chain continues to rotate as required and, thanks to the Autoshift function, ends up in the gear that suits your speed.

Of course, we also have something in our range for fans of traditional manual gearing: the classic encapsulated hub gear, the ROHLOFF Speedhub. The very low-maintenance 14-speed drivetrain, which is often chosen by experienced riders for challenging conditions, can be easily operated using the twist grip.

Motor systems: performance data and technical features

| System | BAFANG M300 | SHIMANO STEPS E5000 |
|-----------------------------|----------------------------|-------------------------------|
| Support up to [for US only] | 25 km/h (16 mph) [20 mph] | 25 km/h (16 mph) [20 mph] |
| Push assist up to | 6 km/h (4 mph) | 6 km/h (4 mph) |
| Range | up to 150 km (93 miles)* | up to 189 km (117 miles)** |
| Force amplification | 5 levels | 3 levels: Eco / Normal / High |
| Max. torque | 80 Nm | 40 Nm |
| Rated power | 250 W | 250 W |
| Maximum power | 550 W | 420 W |
| Rechargeable battery | BAFANG 43 V Li-Ion | SHIMANO 36V Li-Ion |
| Support | independent of pedal power | up to 200 % |
| Energy content | 450 Wh | 418 Wh (opt. 630 Wh) |
| Battery weight | 2.65 kg (5.8 lbs) | 2.6 kg (5.7 lbs) |
| Battery life | 500 charging cycles | 800–1000 charging cycles |
| Charger | Bafang (2 A) | Shimano (2 A, opt. 4 A) |
| Charging time | 6.5 hours | 6.5 hours (3.5 hours: 80 %) |
| | | |

Shimano STEPS E6100 25 km/h (16 mph) [20 mph] 6 km/h (4 mph) up to 177 km (110 miles)** 3 levels: Eco / Normal / High 60 Nm 250 W 500 W SHIMANO 36V Li-Ion up to 200 % 418 Wh (opt. 630 Wh) 2,6 kg (5.7 lbs) 800-1000 charging cycles Shimano (2 A, opt. 4 A) 6,5 hours (3,5 hours: 80 %)

Shimano STEPS EP801 Cargo

25 km/h (16 mph) [20 mph] 6 km/h (4 mph) up to 191 km (118 miles)** 3 levels: Eco / Trail / Boost 85 Nm 250 W 600 W SHIMANO 36V Li-Ion up to 400 % 418 Wh (opt. 630 Wh) 2,6 kg (5.7 lbs) 800 - 1000 charging cycles Shimano (2 A, opt. 4 A) 6,5 hours (3,5 hours: 80 %)

* Range measured by HP VELOTECHNIK under similar conditions as for the SHIMANO STEPS motors.

** Range as stated by SHIMANO: support mode Eco, flat terrain, 23 km/h (14.3 mph), system weight 105 kg (231 lbs), temperature 23°, standard battery with 418 Wh.

Features

Delta tx – as versatile as you wish

Optional features for true individuals: Do you have your own notion of your ideal trike technology? Our modular system enables us to build your trike to meet your needs and desires. A whole range of reliable features and components is available for your *Delta tx*, all of which have been specially developed to excel in everyday use.

On this page we present selected accessories. All other options can be found on the following price pages. Or take a look at the online configurator and get an additional visual impression. You can contact your HP VELOTECHNIK dealer for detailed advice. He knows the advantages of the various components, can tell you the maintenance intervals, and will gladly help you tailor your *Delta tx*'s features to match its intended use, your riding style, and your needs.



The Headrest for the ErgoMesh and ErgoMesh Premium seats can be adjusted in height and inclination in seconds thanks to its quickrelease design. The mesh upholstery is washable.



With the extra-large viewing window of the *Rear mirror* B&M *Cyclestar E*, you can see what's going on behind you. The field of view is easily adjustable, but remains in position even on poor roads.



Walking aid mount: Easy insertion, safe transport and fast removal of walking aids. The practical fastener adjusts seamlessly to diameters from 20 to 31 mm (0.78" to 1.18"). HP VELOTECHNIK's stainless steel clip fixates the walking aid and releases it again with a non-fumbling one hand operation.



crease safety in extreme riding situations, for example on inclines or when starting off with a lot of power. Recommended for: tall riders, with a high seat, with a *Bag hold*er, with a high luggage load; always with the extra powerful drive option SHIMANO STEPS EP801 Cargo.

The Anti-tip wheels in-



Immobiliser: Push out the handle, pull out the key – and the powerful *Frame lock* AXA *Imenso* effectively locks the front wheel. The AXA accessory *Chain for frame lock* (1 m / **39**" long) is recommended as an extra to securely lock the trike to a bicycle parking device.



Pedal with heel strap: The alternative for those who do not want or may not be able to use clipless pedal systems. Easy entry with any kind of shoe through the automatically self-righting positioning. Further special pedals, for example with lower leg fixation, can be found on the next page.



The choice is yours! Our modular kit for your dream trike:

Basic model

| Delta tx basic model (DET) separable Chopper-E-Trike with 20" wheels | \$ 7,250.00 |
|--|-------------|
| Delta tx Special Edition (DETV) pre-configured with extensive features | \$ 8,750.00 |

| | Basic configurationOption with upcharge | O Option, no upchargeNot available | | DET | DETV |
|---|--|---|-----------|-----|------|
| Frame | | | | | |
| Colors | | | | | |
| 🗅 Blue flash | | | \$ 0.00 | Ο | 0 |
| Sparkling iron gray | | | \$ 0.00 | Ο | 0 |
| Seat | | | | | |
| Seats | | | | | |
| ErgoMesh mesh seat with Or Add-on bags | rthoFlex technology, prepare | d for optional | \$ 0.00 | 0 | 0 |
| ErgoMesh XL 2" / 5 cm wider longer than ErgoMesh seat | r, backrest 1.6" /4 cm and se | eat 2"/5 cm | \$ 0.00 | 0 | 0 |
| LergoMesh HS 4.3" / 11 cm hi | gher than ErgoMesh seat | | \$ 0.00 | Ο | 0 |
| ErgoMesh HS XL 4.3" / 11 cr | n higher than ErgoMesh XL | seat | \$ 0.00 | Ο | 0 |
| ErgoMesh Premium with Or back angle independently adju | С, | | \$ 359.00 | | |
| □ ErgoMesh Premium XL 2"/ longer than ErgoMesh Premium | 5 cm wider, backrest and se | | \$ 359.00 | | |
| □ ErgoMesh Premium HS 4.3 | | sh Premium seat . | \$ 359.00 | | |
| ErgoMesh Premium HS XL XL seat | | | \$ 359.00 | • | |
| Accessories | | | | | |
| Headrest adjustable in height | t and angle, with quick rele | ase lever | \$ 189.00 | | |
| Rain cover for seats, Ripstop | | | \$ 25.00 | | |
| Adjustable end stops allow | | | \$ 19.00 | | |
| Seat angle adapter for Erg backrest in a more upright po | oMesh Premium seats, to adj | | \$ 119.00 | - | |
| Suspension | | | | | |
| Rear shock DNM DV-22 sp (up to 100 kg / 220 lbs) | ring / oil, with standard sprir | ng | \$ 0.00 | • | • |
| | up to 175 lbs/80 kg 🗅 up t | o 320 lbs / 145 kg | \$ 0.00 | 0 | _ |
| | up to 175 lbs/80 kg 🕒 up t | | \$15.90 | - | |
| Rear shock ROCKSHOX Mo adjustable damping, lock-out, | onarch RL lightweight air s | hock, | \$319.00 | | - |
| Steering | - · | | | | |
| □ Short stem recommended f | for body height $< 5'6'' / 1.70$ | m | \$ 0.00 | 0 | _ |
| Short stem for Special Edition | | | \$ 39.90 | - | |

| | Basic configuration Option, no upcharge Option with upcharge Not available | 1 | DET | DETV |
|----|---|--------------|-----|------|
| Dr | ivetrain | | | |
| | □ BAFANG M300 and SRAM X4 electric assist up to 20 mph, with derailleur SRAM X4 8-speed, Li-Ion battery with 450 Wh | . \$ 0.00 | • | - |
| | □ BAFANG M300 and ENVIOLO Automatiq electric assist up to 20 mph, with ENVIOLO Trekking Automatiq stepless automatic gear hub, Li-lon battery with 450 Wh | . \$1.199.00 | • | • |
| | □ SHIMANO STEPS E5000 and SRAM X4 electric assist up to 20 mph, with derailleur SRAM X4 8-speed, Li-Ion battery with 418 Wh | . \$319.00 | • | - |
| | □ SHIMANO STEPS E5000 and Nexus Di2 electric assist up to 20 mph, SHIMANO Nexus Di2 8-speed automatic gear hub, Li-lon battery with 418 Wh | | • | - |
| | □ SHIMANO STEPS E6100 and Nexus Di2 electric assist up to 20 mph, SHIMANO Nexus Di2 8-speed automatic gear hub, Li-lon battery with 418 Wh | | | |
| | □ SHIMANO STEPS EP801 Cargo and Cues Di2 electric assist up to 20 mph, SHIMANO Cues Di2 10-speed automatic derailleur, Li-lon battery with 418 Wh | | | |
| | □ SHIMANO STEPS EP801 Cargo and ENVIOLO Automatiq electric assist up to 20 mph, with ENVIOLO Trekking Automatiq stepless automatic gear hub, Li-lon battery with 418 Wh | | | |
| | □ SHIMANO STEPS EP801 Cargo and ROHLOFF electric assist up to 20 mph, ROHLOFF 14 gear internal gear hub, Li-lon battery with 418 Wh | . \$2.979.00 | - | - |
| | Big battery pack SHIMANO STEPS Li-lon battery with 630 Wh, fast charger with 4 A | . \$ 485.00 | • | - |
| Sa | fety equipment | | | |
| | Lighting system IQ XS friendly LED-headlight B&M IQ-XS friendly, . powered by E-bike battery, up to 80 Lux, rear light B&M Toplight 2C DC | . \$ 0.00 | • | • |
| | □ Lighting system IQ-X LED-headlight B&M IQ-X, up to 80 Lux, rear light B&M Toplight 2C DC, only with SHIMANO STEPS drive systems | . \$ 99.00 | • | - |
| | □ Indicator lights system WingBling two indicator lights, both front and back | \$ 699.00 | • | - |
| | Rear mirror B&M Cyclestar E mounted on the handlebar | . \$ 42.00 | | |
| | Given State Frame lock AxA Imenso with removable key, without chain, black | | | |
| | Chain for frame lock AxA Imenso length 39.4" / 100 cm | | | |
| | □ Anti-tip wheels recommended for tall riders, high seats, with bag holders, always with SHIMANO STEPS EP801 Cargo | | • | |
| | □ Flag HP VELOTECHNIK double-sided print, with reflective strip | \$ 29.00 | | • |



Choose the components of your *Delta tx* with ease by using our comprehensive, clearly structured online configurator. Simply scan the QR-Code with your tablet-computer or type into your web browser <u>www.hpvelotechnik.com/produkte/konfigurator</u>

Prices and options

| ● Basic configuration ○ Option, no upcharge ■ Option with upcharge - Not available | DET DETV | ● Basic configuration ○ Option, no upcharge ■ Option with upcharge − Not available | DET |
|--|---|--|-------------------|
| Brakes | | Comfort and ability options (continued) | _ |
| Disc brakes SHIMANO BR-MT200 hydraulic, separately operated rear wheel brakes Hydraulic disc brakes RIDEREVER coupled, additional rear brake | \$ 0.00 • • \$ 319.00 • - | Pedals Clipless pedals Sнимано XT PD-T8000 lightweight, multi-purpose pedal for normal and SPD shoes | \$119.00 |
| hydraulically coupled rear brake, additional mechanical disc brake AVID BB7 at the rear with parking brake function, adjustable grip width hydraulic brake lever is: | ¢ 249.00 | Pedal with heelstrap and foot clamp single sided easy entry and positive grip, adjustable length, standard pedal on the other side, mounting side of pedal with heelstrap and foot clamp: | \$ 89.50 |
| □ Hydraulic disc brakes RIDEREVER coupled, additional front brake . hydraulically coupled rear brake, additional mechanical disc brake AVID BB7 with parking brake function at the front, adjustable grip width, limited possibility to split the vehicle brake lever is hydraulic: □ left □ right | \$ 349.00 ■ - | size range: $\square 8.7" - 11"/22 - 28 \text{ cm} \square 10.6" - 13.4"/27 - 34 \text{ cm} \square \text{ left} \square \text{ right}$ $\square \text{ Pedals with heelstrap and foot clamp single sided easy entry and positive grip, adjustable length, size range: \square 8.7" - 11"/22 - 28 \text{ cm} \square 10.6" - 13.4"/27 - 34 \text{ cm}$ | \$179.00 ■ |
| Parking brake rear mechanical on rear wheel, disc brake, detent lever on handlebar, not compatible with coupled brake with additional rear brake | \$ 99.00 🔳 – | ErgoPedal single sided adjustable position, easy entry straps, leg fixation adjustable in length and position, other side standard pedal | \$149.00 🔳 |
| □ Parking brake front mechanical on front wheel, disc brake, detent lever on handlebar, trike splitting very limited, not compatible with coupled brake with additional brake at front, only recommended with additional rear brake | \$ 125.00 ■ - | size range: \Box 7.9" – 11" / 20 – 28 cm \Box 10.6" – 13.4" / 27 – 34 cm \Box left \Box right \Box ErgoPedal left and right adjustable position, easy entry straps, leg fixation adjustable in length and position size range: \Box 7.9" – 11" / 20 – 28 cm \Box 10.6" – 13.4" / 27 – 34 cm | \$ 299.00 |
| | | ErgoPedal with safety release single sided incl. one SPD-pedal | \$199.00 🔳 |
| Transport and Weather protection gear Luggage carrier black, with removable basket, max. load 55 lbs / 25 kg Bag holder holder for one bicycle bag, max. load 26 lbs / 12 kg Trailer hitch for trailers with WEBER coupling, we recommend | \$ 0.00 • • \$ 179.00 • • \$ 199.00 • • | SHIMANO PD-A530, adjustable position, joint-friendly freedom of movement +/-3 degrees, easy entry straps, other side standard pedal, higher safety due to adjustable release force size range: 27.9" – 11" / 20 – 28 cm 2 10.6" – 13.4" / 27 – 34 cm 2 left 2 right ErgoPedal with safety release left and right adjustable position, | \$ 399.00 |
| □ Add-on bags pair of bags for mesh seats, attached to the backrest, I bag water repellent, I bag ventilated, capacity approx. 0.3 gal./ 1,4 per bag, can only be mounted in pairs, max. load 3.3 lbs / 1,5 kg per side | \$ 79.00 | joint-friendly freedom of movement +/-3 degrees, easy entry straps, higher safety due to adjustable release force size range: \Box 7.9" – 11"/20 – 28 cm \Box 10.6" – 13.4"/27 – 34 cm | \$ <i>577.00</i> |
| □ Side Bag Mount mounting for handlebar bags, attached to the seat, maximum load 5 kg / 11 lbs, left and right, incl. ring clamp, unmounted | \$179.00 | ErgoPedal with calf brace single sided adjustable position, | \$ 309.00 |
| □ Water bottle set 2 x 0,6 PE-bottle with HP VELOTECHNIK print, | \$ 75.00 | easy entry straps, leg fixation adjustable in length and position, other side standard pedal | |
| П Mudguards Šкs front and rear, 69 mm wide, with spoiler | \$ 249.00 | size range: \Box 7.9" – 11"/20 – 28 cm \Box 10.6" – 13.4"/27 – 34 cm \Box left \Box right \Box ErgoPedal with calf brace left and right adjustable position, | \$ 629.00 |
| Comfort and ability options | | easy entry straps, leg fixation adjustable in length and position size range: 🖸 7.9" – 11" / 20 – 28 cm 📮 10.6" – 13.4" / 27 – 34 cm | |
| Support belts | * 370 00 - | | |
| □ Pelvic support belt for optimal pelvis support on the seat, also available as XL version (from ca. 39.4" / 100 cm waist size) □ Standard □ XL | \$ 279.00 🔳 – | Walking aid mounts | |
| Chest support belt for optimal upper body support on the seat, | \$ 279.00 🔳 - | □ Walking aid mounts □ Walking aid mount easy fixing and safety clip, price per side mounted at the seat: □ left □ right □ pair | \$ 84.50 |



Delta tx: Fit on three wheels for any challenge in life

Deltatx













'ELOTECHNI



 Delta tx Special Edition: equipped with BAFANG motor, ENVIOLO automatic hub, light *IQ-XS*, *ErgoMesh* seat, headrest, seat rain cover, luggage basket, frame lock, mudguards, steel spring suspension damper,mirror, parking brake .. from **\$ 8,750**

Choose according to your heart's delight – please find all options, accessories and prices on the previous pages!

Detailed product information can be found, in addition to this catalog, on our web pages with a variety of test reports from bike magazines, in our online recumbent configurator and in the practice-oriented operating and maintenance manual.

Personal customer service in your area can be obtained through our large network of retail partners. You will be advised on an individual basis and obtain valuable information on our sophisticated modular system of accessories and professional workshop services. **10 years warranty** is offered by HP VELOTECHNIK for the frame of your new trike. We stand by our products and would like to assure you of sustainable, carefree riding pleasure. Details can be found in the service section of our website.

Excellent quality and service: HP VELOTECHNIK was awarded for five times as the best cycle manufacturer in Germany by the industry association VSF. For us, this is a source of confirmation and motivation. With our dedicated team at HPVELOTECHNIK, we are ready to create your personal dream trike!



Fast, convenient and informative: Selecting the components of your trike is easy with the configurator at www.hpvelotechnik.com. The online configurator provides detailed pictures, technical tips in english language and checks the interplay of your chosen equipment. With your personal configuration number, you can edit your saved component choice, print and call your dealer for advice.

Your custom Delta tx is individu-

ally built to order in our recumbent factory in Kriftel, Germany. You can choose the components according to your needs. By going through a personal consultation at a specialty shop in your area, extensive test rides, useful accessories and expert customer service, you will get a trike that fits you perfectly.

| Your dealer is looking forward to your visit: | | |
|---|--|--|
| | | |
| | | |
| | | |
| | | |
| | | |
| | | |
| | | |
| | | |



HP VELOTECHNIK GmbH & Co. KG • German recumbent engineering • Kapellenstrasse 49 • 65830 Kriftel • Germany • TR cc Frankfurt/M HRA 47004 Phone +49 61 92 - 97 99 2-0 • Fax +49 61 92 - 97 99 2-299 • mail@hpvelotechnik.com • Detailed information and dealer directory on the Internet at www.hpvelotechnik.com